



## SINGLE USE INTRALUMINAL CIRCULAR STAPLER



SUZHOU LANTEX MEDICAL TECHNOLOGY COMPANY LIMITED

Building 7, 58 Xinting Road, High-tech Industrial Zone, 215151 Suzhou, China

Tel: +86 512 6616 7488

Fax: +86 512 6616 7488






Integrated blade and staple driving mechanism ensuring accuracy and consistent cutting and anastomosis



Unique 180° tissue gap setting window  
Controlled tissue compression (2.3mm-1.0mm)

Bigger lumen size to prevent stricture and facilitate instrument removal

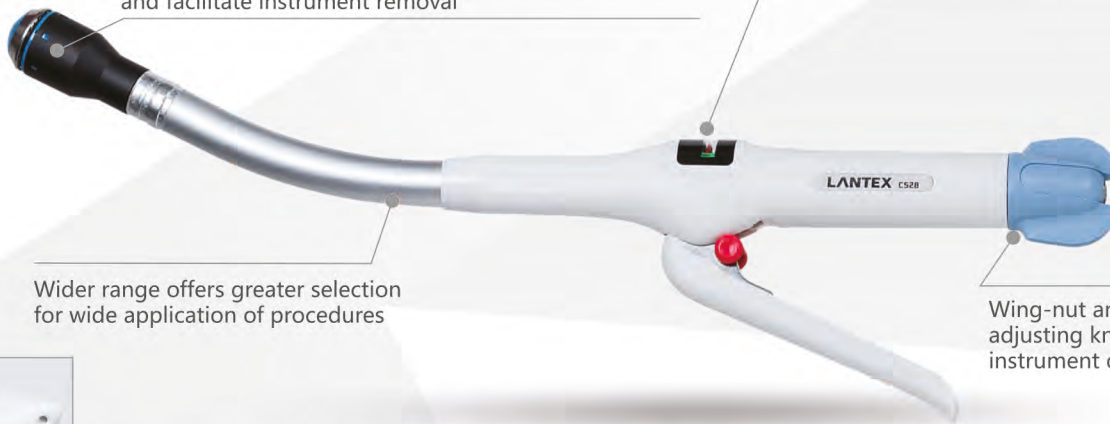

Wider range offers greater selection for wide application of procedures

Wing-nut anti-slippery adjusting knob facilitates instrument control



Conical anvil tip available for easier placement into special anatomy such as esophagus

## PRODUCT SPECIFICATIONS

| PRODUCT CODE | CARTRIDGE COLOR | OUTSIDE DIAMETER (mm) | CUTTING DIAMETER (mm) | STAPLE CROWN LENGTH (mm) | STAPLE LEG LENGTH (mm) | STAPLE COUNT | WORKING LENGTH (mm) | REMARKS                              |
|--------------|-----------------|-----------------------|-----------------------|--------------------------|------------------------|--------------|---------------------|--------------------------------------|
| CS21/CS21L   | Orange          | 21.5                  | 13                    | 4.0                      | 5.0                    | 16           | 420/520             | Curved Standard /Longer Shaft Length |
| CS23/CS23L   | Gray            | 23.5                  | 15                    | 4.0                      | 5.0                    | 18           | 420/520             |                                      |
| CS25/CS25L   | White           | 25.5                  | 17                    | 4.0                      | 5.0                    | 20           | 420/520             |                                      |
| CS28/CS28L   | Blue            | 28.5                  | 20                    | 4.0                      | 5.0                    | 24           | 420/520             |                                      |
| CS32/CS32L   | Green           | 32.5                  | 24                    | 4.0                      | 5.0                    | 28           | 420/520             |                                      |
| CS21C        | Orange          | 21.5                  | 13                    | 4.0                      | 5.0                    | 16           | 430                 | Curved Shaft Conical Anvil Tip       |
| CS25C        | White           | 25.5                  | 17                    | 4.0                      | 5.0                    | 20           | 430                 |                                      |
| CS28C        | Blue            | 28.5                  | 20                    | 4.0                      | 5.0                    | 24           | 430                 |                                      |
| CS32C        | Green           | 32.5                  | 24                    | 4.0                      | 5.0                    | 28           | 430                 |                                      |
| CS21S/CS21ST | Orange          | 21.5                  | 13                    | 4.0                      | 5.0                    | 16           | 420/345             | Straight Standard/Short Shaft Length |
| CS23S/CS23ST | Gray            | 23.5                  | 15                    | 4.0                      | 5.0                    | 18           | 420/345             |                                      |
| CS25S/CS25ST | White           | 25.5                  | 17                    | 4.0                      | 5.0                    | 20           | 420/345             |                                      |
| CS28S/CS28ST | Blue            | 28.5                  | 20                    | 4.0                      | 5.0                    | 24           | 420/345             |                                      |
| CS32S/CS32ST | Green           | 32.5                  | 24                    | 4.0                      | 5.0                    | 28           | 420/345             |                                      |

LTX2017CS01EN